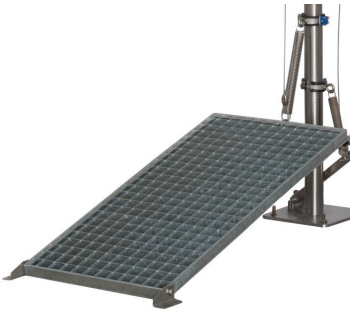




1) Identification

	Safety sign "Eye Shower and Safety Shower", with emergency signs E012 and E011 in accordance with ISO-7010. Inclusive fastening for mounting on the shower arm.	Viewing distance: 15 m Dimensions (H x W x D): 180 x 320 x 40 mm Material: PVC Article-No.: BR 870 100
	Safety sign "Safety Shower", with emergency signs E012 in accordance with ISO-7010 Inclusive fastening for mounting on the shower arm.	Viewing distance: 15 m Dimensions (H x W x D): 180 x 160 x 40 mm Material: PVC Article-No.: BR 870 150
	Floor marking for eye and safety showers Information graphics for safety and eye showers, and directional arrow marks the location of safety Equipment (non-slip Surface, long-lasting luminescence).	Dimensions (H x W x D): 1 x 790 x 390 mm Surface: PVA Material: PVC film, self-adhesive Adhesive properties: Self-adhesive, removable Article-No.: BMK-AD-ND

2) Activation


	Foot lever actuation for eye showers, in addition to the standard actuation. Suitable for use with freestanding eye showers and safety showers. Inclusive fastening for mounting on the standpipe.	Dimensions (H x W x D): 1000 x 223 x 250 mm Material: GRP plastic, stainless steel Color: Orange Article-No.: BR 870 370
	Platform actuation for eye showers and safety showers, in addition to the pull rod or standard actuation. Suitable for use with freestanding eye showers and safety showers. Inclusive fastening for mounting on the floor and standpipe.	Dimensions (H x W x D): 2000 x 400 x 800 mm Material: Stahl, feuerverzinkt Article-No.: BR 870 200
	Platform actuation for eye showers and safety showers, in addition to the pull rod or standard actuation. Suitable for use with freestanding eye showers and safety showers. Inclusive fastening for mounting on the floor and standpipe.	Dimensions (H x W x D): 2000 x 400 x 800 mm Material: Stainless steel Article-No.: BR 870 205
	ClassicLine cable actuation for injured persons lying on the ground, additional to pull rod.	Dimensions (H x W x D): 2000 x 200 x 25 mm Material: Stainless steel, plastic Article-No.: BR 082 200
	ClassicLine disability friendly pull rod with double ring handle, green.	Dimensions (H x W x D): 1150 x 172 x 10 mm Material: Stainless steel Color: Green Article-No.: BR 082 300
	PremiumLine disability friendly pull rod with double ring handle, stainless steel.	Dimensions (H x W x D): 1150 x 172 x 10 mm Material: Stainless steel Surface: Polished Article-No.: BR 082 350

3) Thermostatic mixing valves

	Thermostatic mixing valve for eye showers with automatic scald protection. Including backflow preventer in the drains. Cold water inlet always open. Adjustment range: 20-40°C, preadjusted to 22°C Scald protection: 40°C Flow rate: 20 litres / minute at 1.0 bar differential pressure	Water inlet: 1/2" male Dimensions (H x W x D): 136 x 130 x 46 mm Material: Brass Article-No.: BR 710 940
	Thermostatic mixing valve for safety showers with automatic scald protection. Including backflow preventer in the drains. Cold water inlet always open. Adjustment range: 20-43°C, preadjusted to 22°C Scald protection: 43°C Flow rate: 110 litres / minute at 2.0 bar differential pressure	Water inlet: 1" male Dimensions (H x W x D): 162 x 164 x 56 mm Material: Brass Article-No.: BR 710 950
	Thermostatic mixing valve set for safety showers with automatic scald protection. Including backflow preventer in the drains. Cold water inlet always open. Adjustment range: 20-43°C, preadjusted to 22°C Scald protection: 43°C Flow rate: 160 litres / minute at 1.0 bar differential pressure	Water inlet: 1 1/4" female Dimensions (H x W x D): 300 x 290 x 235 mm Material: Stainless steel, brass Article-No.: BR 710 960

4) Accessories / options

	Backflow preventer (Check Valve) 3/4" male for eye showers and safety showers.	Water inlet: 3/4" male Water outlet: 3/4" female Material: Stainless steel Article-No.: CHV34
	Backflow preventer (Check Valve) 1 1/4" male for freestanding eye showers and safety showers.	Water inlet: 1 1/4" male Water outlet: 1 1/4" female Material: Stainless steel Article-No.: CHV114
	Maintenance ball valve with removable trigger lever. For Hand-held eye showers and eye showers.	Water inlet: 1/2" male Water outlet: 1/2" male Material: Brass Article-No.: BR 710 100
	Hose brake / hose weight for hand-held eye showers.	Dimensions (H x W x D): 40 x 60 x 40 mm Material: Plastic Color: Grey Article-No.: BR 710 380
	Stainless steel covered hose as connection hose for eye showers and hand-held eye showers, DIN-DVGW tested and certificated. Available in different lengths: 1000 mm = BR710410, 1500 mm = BR710415, 2000 mm = BR710420, 3000 mm = BR710430	Nominal size: DN 8 Pressure stage: PN 10 Water inlet: 1/2" female Water outlet: 1/2" female Article-No.: BR 710 4XX

	Stainless steel covered hose as connection hose for eye showers and hand-held eye showers, DIN-DVGW tested and certificated, Length: 1500 mm. With an additional transparent PVC sheath for easy cleaning.	Nominal size: DN 8 Pressure stage: PN 10 Water inlet: 1/2" female Water outlet: 1/2" female Article-No.: BR 710 475
	Service shut-off with removable release lever. For eye showers and wall-mounted safety showers.	Water inlet: 3/4" female Water outlet: 3/4" male Material: Stainless steel Article-No.: BR 830 955
	Service shut-off with removable release lever. For self-draining freestanding eye showers and safety showers.	Water inlet: 1" female Water outlet: 1" male Material: Stainless steel Article-No.: BR 830 953
	Service shut-off with removable release lever. For freestanding eye showers and safety showers.	Water inlet: 1 1/4" female Water outlet: 1 1/4" male Material: Stainless steel Article-No.: BR 830 950
	Strainer 3/4" female for eye showers and body safety showers. For installation in front of the ball valve - integrated into the pipework.	Water inlet: 3/4" female Water outlet: 3/4" female Material: Stainless steel Article-No.: BR 830 988
	Strainer 1 1/4" female for freestanding eye showers and body safety showers. For installation in front of the water connection of the freestanding safety shower.	Water inlet: 1 1/4" female Water outlet: 1 1/4" female Material: Stainless steel Article-No.: BR 830 989
	Pressure reducer (pressure reducer, pressure regulator) 3/4" male with pressure gauge. For wall-mounted eye showers and safety showers.	Water inlet: 3/4" male Water outlet: 3/4" male Material: Brass Article-No.: BR 830 992
	Pressure reducer (pressure reducer, pressure regulator) 1 1/4" male with pressure gauge. For wall-mounted eye showers and safety showers.	Water inlet: 1 1/4" male Water outlet: 1 1/4" male Material: Brass Article-No.: BR 830 991
	ClassicLine high-performance shower head with shower bell. Also available for equipping body safety showers.	Water inlet: 3/4" female Material: Plastic Color: Grün, Schwarz Article-No.: BR 010 377
	PremiumLine high-performance shower head with shower bell, stainless steel. Also available for equipping body safety showers.	Water inlet: 3/4" female Material: Stainless steel Surface: Polished Article-No.: BR 010 397


5) Protection valves

	Scald protection valve for safety showers. <u>Switch Points:</u> Open at 41°C, close at 35°C.	Water inlet: 1/2" female Water outlet: 1/2" female Material: Stainless steel Article-No.: BR 830 970
	Freeze protection valve for safety showers. <u>Switch Points:</u> Open at 1°C, close at 4°C.	Water inlet: 1/2" female Water outlet: 1/2" female Material: Stainless steel Article-No.: BR 830 980
	Connection adapter 3/4-Zoll, T-piece, for connection of the protection valves before the safety shower water connection. For wall-mounted eye showers, body safety showers and safety shower combinations.	Water inlet: 3/4" female Water outlet: 3/4" male Material: Stainless steel Article-No.: BR 830 985
	Connection adapter 1-Zoll, T-piece, for connection of the protection valves before the safety shower water connection. For self-draining freestanding eye showers and safety showers.	Water inlet: 1" female Water outlet: 1" male Material: Stainless steel Article-No.: BR 830 987
	Connection adapter 1 1/4", T-piece, for connection of the protection valves before the safety shower water connection. For freestanding eye showers and safety showers.	Water inlet: 1 1/4" female Water outlet: 1 1/4" male Material: Stainless steel Article-No.: BR 830 986

6) Accessories for mounting

	Wall bracket for body safety showers, green.	Dimensions (H x W x D): 255 x 250 x 245 mm Material: Stainless steel, plastic Color: Grün Article-No.: BR 082 110
	Mounting set for recessed mounting or in panels / laboratory furniture.	Water inlet: 3/4" male Water outlet: 3/4" female Material: Stainless steel, plastic Article-No.: MONT-UP-1
	Fixing anchor set for fixing freestanding safety showers to a building site concrete foundation. (4 pieces)	Diameter: 10 mm Length: 50 mm Material: Steel, galvanised Article-No.: BR 830 993
	ANSI flange B16.5, 150 LBS, form RF. Including double nipple / reducing nipple to 1 1/4" male. For freestanding eye showers and safety showers.	Water inlet: at your choice Water outlet: 1 1/4" male Material: Stainless steel V4A / AISI-316 Article-No.: BR 014 XXX
	DIN flange PN 10, with mounting. Including double nipple / reducing nipple to 1 1/4" male. For freestanding eye showers and safety showers.	Water inlet: at your choice Water outlet: 1 1/4" male Material: Stainless steel V4A / AISI-316 Article-No.: BR 016 XXX

7) Alarm systems

	Alarm system with siren-/flashlight combination. Prewired junction box inclusive electronic switch. For eye showers and safety showers.	Electrical supply: 230 V - 50 Hz Material: plastic, various materials Article-No.: BR 015 800
	Switch for body safety shower alarm, EX-Zone 1 & 2. Complete pre-assembled on shower.	Material: various materials Article-No.: BR 830 400
	Switch for body eye shower alarm, EX-Zone 1 & 2. Complete pre-assembled on shower.	Material: various materials Article-No.: BR 830 450
	Flow switch, protection degree IP 65, electrical supply with 1.5 m cable. For eye showers and safety showers.	Water inlet: 1/2" female Water outlet: 1/2" female Material: Stainless steel Article-No.: BR 710 812
	Flow switch, protection degree IP 65, electrical supply with 1.5 m cable. For eye showers and safety showers.	Water inlet: 3/4" female Water outlet: 3/4" female Material: Stainless steel Article-No.: BR 710 834
	Flow switch, protection degree IP 65, electrical supply with 1.5 m cable. For freestanding eye showers and safety showers.	Water inlet: 1 1/4" female Water outlet: 1 1/4" female Material: Stainless steel Article-No.: BR 710 854